



AGENDA ITEM EXECUTIVE SUMMARY

Agenda Item:	Resolution Authorizing the City Administrator to Purchase a 2020 Peterbilt Model 348 single axle dump and snowplow from JX Truck Centers of Elmhurst.		
Presenter & Title:	Nate Landers, Superintendent of Streets, Fleets, and Facilities		
Date:	February 25, 2019		
Please Check Appropriate Box:			
<input checked="" type="checkbox"/>	Committee of the Whole Meeting	<input type="checkbox"/>	Special Committee of the Whole Meeting
<input checked="" type="checkbox"/>	City Council Meeting	<input type="checkbox"/>	Special City Council Meeting
<input type="checkbox"/>	Public Hearing	<input type="checkbox"/>	Other -
Associated Strategic Plan Goal/Objective: EMS-III: The City provides equipment, infrastructure and facilities necessary to maintain efficient and reliable public services.			
Estimated Cost: \$ 184,667	Budgeted? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	Other Funding? <input type="checkbox"/> Yes <input type="checkbox"/> No	
<i>If "Other Funding," please explain how the item will be funded:</i>			
Executive Summary:			
<p>The 2020 capital equipment budget provides for the purchase of a dump truck to replace a 2000 GMC C-8500 (G-3048). G-3048 is a critical piece of front-line snow removal equipment.</p> <p>Quotes were requested on joint purchasing platforms from Sourcewell (formerly known as the National Joint Purchase Alliance or NJPA). Sourcewell is available to municipalities and works using the same principals as the state bid process. The quote is included in the proposal tabulation. The servicing dealer will be JX truck centers in Elmhurst. Staff also recommends having Henderson equipment, who was also awarded the contract through Sourcewell, install the specified upfit for this truck. In addition, staff researched the purchase of the vehicle through the state bid process; however, due to the long lead time for truck build outs, the deadline to place an order through the state bid has passed and the bid term has expired.</p> <p>Staff recommends the purchase of a 2020 Peterbilt Model 348 cab and chassis, due to the long service life, superior quality of the workmanship and products used in manufacturing. The replacement vehicle is a 2020 Peterbilt Model 348 Single axle dump, snowplow with a wing plow included, salt spreader, and pre-wet system from JX Truck Centers of Elmhurst at a total cost of \$184,667.</p>			
Attachments: <i>(please list)</i>			
<ul style="list-style-type: none"> • Resolution • Specifications and quote • Life to date Maintenance • List of current issues and pictures 			
Voting Requirements:			
<p><i>This motion requires six affirmative votes for passage.</i></p> <p><i>The Mayor may vote on three occasions: (a) when the vote of the aldermen or trustees has resulted in a tie; (b) when one half of the aldermen or trustees elected have voted in favor of an</i></p>			

ordinance, resolution, or motion even though there is no tie votes; or (c) when a vote greater than a majority of the corporate authorities is required by state statute or local ordinance to adopt an ordinance, resolution, or motion.

Recommendation / Suggested Action: *(how item should be listed on agenda)*

Recommend approval of resolution authorizing the City Administrator to purchase a 2020 Peterbilt Model 348 single axle dump and snowplow in the amount of \$184,667.00 from JX Truck Centers of Elmhurst through Sourcewell.

RESOLUTION NO. 2019-16

**RESOLUTION AUTHORIZING THE CITY ADMINISTRATOR TO PURCHASE
A 2020 PETERBILT MODEL 348 SINGLE AXLE DUMP AND SNOWPLOW IN THE
AMOUNT OF \$184,667.00 FROM JX TRUCK CNETERS OF ELMHURST**

**BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF GENEVA, KANE
COUNTY, ILLINOIS**, as follows:

SECTION 1: That the City Administrator is hereby authorized to purchase on behalf of the City of Geneva from JX Truck Centers of Elmhurst, IL a 2020 Peterbilt Model 348 single axle dump and snowplow as described on Exhibit "A."

SECTION 2: This Resolution shall become effective from and after its passage as in accordance with law.

PASSED by the City Council of the City of Geneva, Kane County, Illinois, this 4th day of March, 2019

AYES: ___ NAYS: ___ ABSENT: ___ ABSTAINING: ___ HOLDING OFFICE: ___

Approved by me this 4th day of March, 2019.

Mayor

ATTEST:

City Clerk



February 26, 2019

Sourcewell Contract #081716 PMC

Joe Czyszano
City Of Geneva
1800 South St
Geneva, Il. 60134

Dear Joe,

JX Peterbilt – Wadsworth is pleased to present a price quotation for (1) New 2020 Peterbilt Model 348 single axle chassis only with the enclosed specifications on Quote. Body and plow to be supplied and billed by others.

**Sourcewell Contract #081716-PMC
Peterbilt Motors company**

List Price 1 Peterbilt Model 348 single axle chassis only	\$137,281.00
Model 348 NJPA discount (32.54%)	-(\$ 44,671.00)
Total truck chassis	\$ 92,609.00
Sourced Goods and services	
Detail fuel and def ,Title plates	\$ 575.00
Total Sourced Goods and services	\$575.00
Total truck chassis cost	\$92,609.00
Total Sourced goods and services	\$ 575.00
Total truck cost to customer	\$93,184.00

Full payment for Peterbilt chassis due Net 30 days at time of delivery to chosen body builder.
Interest charges will be billed of 16.45 per day after 30 days.

Please feel free to contact me at 224 678 6669 with any questions. Thank you for the opportunity to earn your business.

Sincerely,


Rick Venuso
Sales Executive.
Cell 224 678 6669
JX Peterbilt – Wadsworth


Stephanie K. Dawkins
City Administrator
City of Geneva, IL

PO Box 189, Wadsworth IL 60083
42400 Old Hwy 41
Business 847.395.7222 Toll Free 800.243.0524 Fax 847.395.7240

Visit us at
www.JXE.com





JX Peterbilt - Wadsworth P125
42400 Hwy. 41

Geneva Public works
1800 South St

Wadsworth, Illinois United States 60083
Phone: (847) 395-7222
Fax: (847) 395-7240
Email: RVenuso@jxe.com

Geneva, Illinois United States 60134
Phone: (630) 232-1502
Fax:
Contact Email: jczyszczon@Geneva.il.us
Prepared for: Joe Czyszczon

Vehicle Summary

	Unit		Chassis	
Model:		Model 348	Fr Axle Load (lbs):	20000
Type:		Full Truck	Rr Axle Load (lbs)	23000
Description:		Geneva sing 2019 pric SW	G.C.W. (lbs):	60000
	Application		Road Conditions:	
Intended Serv.:		Snowplow	Class A (Highway)	100
Commodity:		Other Commodity	Class B (Hwy/Mtn)	0
	Body		Class C (Off-Hwy)	0
Type:		End Dump	Class D (Off-Road)	0
Length (ft):		14	Maximum Grade:	6
Height (ft):		8.5	Wheelbase (in):	172
Max Laden Weight (lbs):		1000	Overhang (in):	62.8
	Trailer		Fr Axle to BOC (in):	69.8
No. of Trailer Axles:		0	Cab to Axle (in):	102.2
Type:			Cab to EOF (in):	165.0
Length (ft):		0	Overall Comb. Length (in):	301
Height (ft):		0.0		
Kingpin Inset (in):		0	Special Req.	
Corner Radius (in):		0	United States Registry	

	Restrictions	
Length (ft):		65
Width (in):		102
Height (ft):		13.5

Approved by: _____ Date: 1-25-19

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



JX Peterbilt - Wadsworth P125
42400 Hwy. 41

Geneva Public works
1800 South St

Wadsworth, Illinois United States 60083
Phone: (847) 395-7222
Fax: (847) 395-7240
Email: RVenuso@jxe.com

Geneva, Illinois United States 60134
Phone: (630) 232-1502
Fax:
Contact Email: jczyszczon@Geneva.il.us
Prepared for: Joe Czyszczon

Data	Code	Description	Weight
Base Model			
0003481	O	Model 348 The Model 348 was designed to exceed the rigid demands of Class 7 and Class 8 specialty application markets that require rugged durability and a wide range of optional content. The Model 348 represents a multi-dimensional performer with a GVW from 33,000 to 66,000 lbs. and optional capacity ratings to suit almost any vocation. The 348 is also available in a specifically designed all-wheel-drive configuration. From construction and crane service to utility and delivery services in both Class 7 and Class 8 markets, the 348 is in a class by itself.	10,610
0091200	O	Other Commodity	0
0093150	O	Snowplow Truck which is configured for mounting a snowplow to the front. May also have dump or other body.	0
0095170	O	End Dump	0
0098170	O	United States Registry	0
Configuration			
0200699	O	Other Secondary Manufacturer (Specify by narrative) N02000 Hendersen Body	0
Frame & Equipment			
0519180	O	11-5/8in Steel Rails to 444in 11.625 x 3.874 x .375 Dimension, 2,568,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 21.4 cubic inches. Weight: 1.91 lbs/inch pair	469
0611330	O	Zinc Coated Anti Corrosion Treated Frame Rails Requires Frame Rail Code. Zinc Phosphate coating will replace the standard frame rail primer and provide added corrosion prevention for your customer's operating in severe conditions or in climates where vehicle rust is common.	0
0612230	O	Custom Wheelbase or Overhang Engineering approval may be required.	0
0613090	S	Three-Piece Crossmembers	58
0620580	O	27.8in Bumper Extension without Adapter Includes Stationary Grille. Requires FEPTO Bumper.	75

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
0644090	S	EOF Square without Xmbr For use with body builder installed crossmember.	0
0651090	S	Omit Rear Mudflaps and Hangers	0

Front Axle & Equipment

1011890	O	PACCAR Steer Axle 20,000 lb, 4 in. Drop Axle is designed for applications with a gross axle weight rating (GAWR) of 20,000 pounds. Front axle is designed for demanding applications such as construction, heavy haul, refuse, and other vocational uses. Robust forged steel beam construction for long-lasting performance. It utilizes innovative tapered kingpin roller bearings for more efficient operation and improved steering efficiency.	170
1114030	O	Taper Leaf Springs, Shocks 20,000 lb Standard with Heavy Resistance Shocks.	189
1243050	O	Power Steering Sheppard HD94 Dual For use with 16,000 to 20,000 lb. axle ratings.	80
1250250	O	Power Steering Reservoir Frame Mounted w/Cooler	2
1354855	O	PHP10 Iron PreSet Hubs-Air Disc	0
1380290	O	Air Disc Front Brakes Complies with reduced stopping distance regulations.	30
1380490	O	PACCAR Wide Track IPO Std 71in KPI IPO 69in for improved turning radius.	15
1391480	O	Pad Dust Shields for Air Disc Brakes; Front Axle	2

Rear Axle & Equipment

1513280	S	Dana Spicer S23-172 23,000 lb	0
1616370	S	PHP10 Iron PreSet Hubs	0
1632650	S	Long Stroke Parking Brakes, Drive Axle(s)	0
1660000	O	Dust Shields For Cam Brakes, Drive Axle(s)	15
1680490	O	Gusseted Cam Brackets, Drive Axle(s)	2
1680500	S	SBM Valve Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system.	0
1680950	S	Stability System Not Selected or Not Available	0
1682430	S	Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0
1686348	S	Single Drive Axle (Model 348)	0
1687020	O	Bendix Air Cam Rear Drum Brakes 16.5x8.6 Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums. Refer to TSB 11-57 for more information.	0
1706140	O	Ratio 6.14 Rear Axle	0
1811210	S	Peterbilt Air Trac 23,000 lb Light Weight	0
1911010	O	Steel Suspension Insert Up To 77in Overhang	185
1920385	O	Air Springs, Internal Bumpers Air Trac / Air Leaf suspensions	0
1922260	O	Dash Mtd Dump Switch With Indicator Light For suspension	2

Engine & Equipment

2074506	O	PACCAR PX-9 350@2000 GOV@2200 1000@1400 Productivity (2017 Emissions) Includes alum flywheel housing, cruise control, and J1939 provisions (provides an interface point for the Electronic Service Analysis-ESA and other PACCAR approved diagnostic tools). Chevron Delo LE SAE 10W30 engine oil is specially formulated for new low emissions engines. Magnetic engine oil drain plug captures and holds any metal fragments in engine oil to extend service life. N21320 N205 68...Standard Maximum Speed Limit [LSL] N21330 N207 0....Expiration Distance N21350 P001 64...Maximum Accelerator Pedal Vehicle Speed N21370 P059 64...Maximum Cruise Speed N21400 N203 252..Reserve Speed Function Reset Distance N21410 N202 0....Maximum Cycle Distance N21420 N206 10...Maximum Active Distance N21430 N201 0....Reserve Speed Limit Offset N21440 P015 NO...Engine Protection Shutdown N21450 P026 NO...Gear Down Protection N21460 P046 1400.Max PTO Speed N21470 P062 NO...Cruise Control Auto Resume N21480 P068 NO...Auto Engine Brake in Cruise N21500 N209 0....Expiration Distance N21510 P520 YES..Enable Idle Shutdown Park Brake Set N21520 P030 5....Timer Setting N21530 P233 YES..Enable Impending Shutdown Warning N21540 P234 60...Timer For Impending Shutdown Warning N21550 P516 35...Engine Load Threshold N21570 P031 NO...Idle Shutdown Manual Override N21590 P230 YES..Enable Hot Ambient Automatic Override	0
---------	---	--	---

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
		N21610 P172 40...Low Ambient Temperature Threshold	
		N21620 P173 60...Intermediate Ambient Temperature Threshold	
		N21630 P171 80...High Ambient Temperature Threshold	
2091305	O	Engine Idle Shutdown Timer Enabled	0
2091315	O	Enable EIST Ambient Temp Override	0
2091372	O	Eff EIST NA Expiration Miles	0
2091640	O	Effective VSL Setting NA	0
2140010	O	Belly Pan	35
2140200	S	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins ISL, ISM and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0
2513060	S	PACCAR 160 Amp Alternator, Brushed	0
2521090	O	Immersion Type Block Heater 110-120V Standard location is center left hand under cab and includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.	2
2522110	S	PACCAR 12V Starter N/A PACCAR MX Engines	0
2538040	O	3 PACCAR Premium 12V Dual Purpose Batt 2190 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance.	62
2539410	O	Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-7 engines.	4
2539740	O	Kissling Battery Disconnect Switch 300 AMP; Mounted on battery box	3
2621000	O	2-Speed Fan Clutch For Frequent Start/Stops	0
2723210	S	18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0
2921160	S	Spin-On Fuel/Water Separator	0
2921210	S	No Fluid Heat Option for Fuel Filter	0
2921320	O	12V Heat for Fuel Filter	0
3010400	O	Engine Protection Shutdown Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 587: 1330 sq in, 579/367 FEPTO 1325 sq in, 567/365/367: 1440 sq in, 384/386: 1301 sq in, 365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in, 320: 1242 sq in.	0
3211120	S	Radial Seal, Dry Type Air Cleaner, Frontal Air Intake. Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0
3365270	O	Exhaust Single RH Side Of Cab DPF/SCR RH Under Cab (2017).	29
3381770	O	Curved Tip Standpipe(s)	0
3387610	O	18in Ht, 5in Dia Chrome, Clear Coat Standpipe(s)	-2

Transmission & Equipment

4052110	O	Allison 3000 RDS-P Transmission, Gen 5 Rugged Duty Series. Includes Rear Transmission Support except on MX engines, TranSynd Automatic Transmission Fluid, and Water Oil Heat Exchange. Also includes features that monitor the transmission fluid, filter and clutch condition. Will display percent life remaining for the transmission fluid, filter and clutches on the shift selector. This information may be displayed using the Mode and Up and Down buttons. A wrench icon will also be included to indicate when the transmission fluid, filter or clutches need servicing. (Suited for vehicles operating on/off highway and/or requiring PTO operation) Forward Ratios: 1st-3.49, 2nd-1.86, 3rd-1.41, 4th-1.00, 5th-0.75, 6th-0.65 / Reverse Ratios: DR-(5.03)	195
4210080	S	1710 HD Driveline, 1 Midship Bearing	0
4250650	O	LH PTO Access Dipstick Tube Routing,Allison Trans	0
4252890	O	Allison FuelSense 2.0 Not Desired	0
4252950	O	Omit Allison Neutral At Stop	0
4256640	O	Allison 6-Speed Configuration, Close Ratio Gears 3000 Series Transmissions	0
4256980	O	Seat Mounted Lever Shifter	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
4256990	O	Rolling Direction Change Shift Inhibit Feature Allison Transmissions. A programmable feature that keeps the transmission from shifting from Drive to Reverse or from Reverse to Drive above a preset speed. This wireless function is enabled when a switch is closed to complete the circuit between input wire 101 and ground. Frequently the function is interfaced with a switch indicating activation of another vehicle function, such as application of the service brakes. When the function is enabled, the TCM will recognize the request for a direction change shift, Reverse-to-Drive or Drive-to-Reverse. If all other operating conditions are acceptable, the TCM will command the requested shift. The enable remains in effect until the switch is opened, followed by the selection of a different direction, Reverse or Drive, at the shift selector. This could be used for doc spotters and refuse. If the function is not enabled, any shift which results in a change of direction is inhibited.	0

Air & Trailer Equipment

4510330	O	Bendix AD-IS EP Air Dryer with Heater And Coalescing Filter; Extended Purge	6
4520420	O	Pull Cords All Air Tanks	0
4540420	S	Nylon Chassis Hose	0
4543340	O	Aluminum Painted Air Tanks All air tanks are aluminum with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	-45

Tires & Wheels

5064010	O	FF: BR 20PLY 315/80R22.5 M870 Diameter= 42.8 inches; SLR= 19.9 inches	86
5166610	O	RR: BR 14ply 11R22.5 M726ELA	60
5190004	O	Code-rear Tire Qty 04	0
5220520	O	FF: Alcoa 89U637 22.5X9.00 Clean Buff Finish Aluminum, Ultra ONE wheels with MagnaForce alloy.	-36
5320270	O	RR: Alcoa Ultra7 22.5X8.25 Clean Buff Finish Aluminum	-108
5390004	O	Code-rear Rim Qty 04	0

Fuel Tanks

5554100	O	26in Aluminum 70 Gallon Fuel Tank LH U/C Includes steps for cab access. Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	11
5602070	O	Location LH U/C 70 Gallon	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
5652890	O	DEF Tank Mounted LH BOC Models 220 and 520 mounted LH cab fender	0
5652990	O	Standard DEF To Fuel Ratio 2:1 Or Greater	0
5655019	S	DEF Tank Small	0

Battery Box & Bumper

6010780	O	Aluminum Space Saver Battery Box RH BOC Battery access from side	-84
6030150	O	Rubber Battery Pad In Bottom Of (1) Battery Box Mat in box that holds batteries only	2
6040550	S	Aftertreatment RH U/C ALUMINUM Non-Slip Cab Entry Step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box will be aerodynamic.	0
6121060	O	Steel Bumper Swept Back Painted Black, With FEPTO (2) Tow pin holes and step plates on top of bumper	90

Cab & Equipment

6510110	S	Alum Cab 108in BBC Metton Hood w/Bright Crown Includes view window RH door and convex mirror over RH door.	0
6540120	O	Severe Service Cab Package #1 Includes Aluminum side skins, aluminum rear skin, steel windshield mask, steel firewall, and steel front floor sheet on all cabs, and additional reinforcement structure on the back wall of the day cab.	39
6540160	O	Thermal Insulation Package in Cab Includes thick, closed-cell foam in floor, special mylar-faced foam in walls and roof structure.	2
6800360	O	Rubber Fender Lips 2 Inch Wide	8
6911700	S	Peterbilt UltraRide Driver Seat	0
6921700	S	Peterbilt UltraRide Passenger Seat	0
6930500	O	Drivers Armrest - RH Only	2
6931120	O	Seat Belt Color Orange IPO Standard Black	0
6939400	S	Air Ride Driver	0
6939420	S	High Back Driver	0
6939470	S	Vinyl Driver	0
6939500	O	Air Ride Passenger	43
6939520	S	High Back Passenger	0
6939570	S	Vinyl Passenger	0
7001520	O	Adjustable Steering Column - Tilt/Telescope	11
7001620	S	Steering Wheel with Peterbilt Logo Steering Wheel with embossed Peterbilt logo over horn button.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
7036120	S	Interior Grey/Black Includes rugged charcoal instrument panels, glare-resistant gray dash, black bezels on gauges, (2) power ports, monochromatic molded door pads with durable in-mold color, gray molded back wall, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, extruded rubber floor covering, header-mounted dome light, foot well lighting, integrated "dead pedal", (4) inside entry grab handles, (2) inside sunvisors, (2) coat hooks, (2) cup holders and map bin in dash.	0
7210430	O	Extended Rear Window ipo Std Window-Day Cab The extended rear window protrudes two inches more than the standard conventional rear cab window. Take this into consideration when determining your loadspace.	18
7210540	S	Day Cab Rear Window	0
7230060	S	One Piece Curved Windshield	0
7322010	S	Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0
7330700	O	Peterbilt Comfort Control - Cab	6
7410040	O	Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper.	4
7511010	O	Stainless Steel Mirrors 7x16 with Heat Element Right Click on Option to see Picture in Product Portfolio.	2
7564110	O	Power Package Includes power door locks and power windows.	0
7610020	O	(1) Air Horn 15in Painted Mounted under cab.	8
7725710	O	Standard Speaker Package For Cab (2) Speakers	4
7725715	O	ConcertClass Without CD, Includes BT Phone and Audio, AM/FM, WB, USB and MP3.	10
7788140	O	Radio Antenna Mounted on LH Mirror Bracket	0
7850210	O	Plug-In Auto Reset Circuit Breaker in place of fuses in junction box.	0
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0
7900090	O	Triangle Reflector Kit Shipped Loose	13
7900270	O	Fire Extinguisher; Cab Mounted Hazmat approved UL listed/rated ABC.	8
7901130	O	Backup Alarm (107dB)	3
8011400	O	Main Transmission Oil Temperature Gauge Located in Driver Information Display	0
8021380	S	Air Restriction Indicator Mounted on air cleaner,intake piping, or firewall.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Data	Code	Description	Weight
8032420	O	Buzzer On Air Suspension Dump Valve Requires dash mounted dump valve (1922260)	0
8071870	S	Main Instrumentation Panel, Graphics Display Includes speedometer with tripodometer, tachometer with hourmeter and outside air temperature display, voltmeter, engine oil pressure, engine coolant temperature, fuel level, primary and secondary air pressure gauges. Includes standard warning light package: high water temperature, low oil pressure, and low air pressure warning lights w/audible alarms, high beam, turn signal, low fuel, parking brake, and ice warning indicators; seat belt reminder; rocker switches with long-life LED indicators; multi-function turn stalk with flash-to-pass feature (night mode flashes headlights and marker lights; day mode flashes headlights only), intermittent windshield wiper and headlamp beam control. Hydraulic braked trucks do not include air pressure gauges.	0
8111110	S	Headlights Composite Fender Mounted Integral park, turn, and side marker	0
8120980	S	(5) Marker Lights, Aero LED Light Emitting Diodes	0
8133470	O	Switch & Wiring For F/O Beacon/Strobe 10 ft coiled wire BOC/BOS at rear sill	2
8140120	S	Incandescent Square Stop/Turn/Tail/Backup LH/RH Square EOF or Dropped A-Brace	0

Paint

8530770	S	(1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - B8779EY SCHOOL BUS YE N85400 HOOD TOP B8779EY SCHOOL BUS YE N85500 CAB ROOF B8779EY SCHOOL BUS YE N85200 FRAME L0001EA BLACK N85700 BUMPER L0001EA BLACK N85300 FENDER B8779EY SCHOOL BUS YE	0
---------	---	--	---

Options Not Subject To Discount

9400091	S	Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km	0
9400094	S	PACCAR PX-9 Standard Coverage 2 yrs/250,000 mi (402,336 km)/6,250 hrs	0

Miscellaneous

9409800	O	2017 EPA Emissions Engine Warranty Only	0
9409843	O	Peterbilt Sourcewell Program Code	0
9409960	O	Presentation Created Using Featured Spec For Model	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10



Total Adjusted Price (W/O Freight & Warranty & Surcharges)	\$137,281
Freight Charge	\$2,400
Options Not Subject to Discount	\$0
Surcharges Not subject to Discount	\$0
Total Weight	12397

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	1/24/2019 12:30:52 PM	Complete	Model Number:	Model 348
Effective Date:	Jan 1, 2019		Quote/DTPO/CO:	Q33012214
Prepared by:	Rick Venuso		Version Number:	38.10

JX Peterbilt - Wadsworth P125
42400 Hwy. 41

Geneva Public works
1800 South St

Wadsworth, Illinois United States 60083
Phone: (847) 395-7222
Fax: (847) 395-7240
Email: RVenuso@jxe.com

Geneva, Illinois United States 60134
Phone: (630) 232-1502
Fax:
Contact Email: jczyszczon@Geneva.il.us
Prepared for: Joe Czyszczon

Fuel Tanks

Summary

Right Left

Location

- Under Cab
- Back Of Cab 1
- Back Of Cab 2
- Between Rails
- ClearFrame
- Def Tank

Type

Material

Diameter

Top View Right Side Available Space: 43.45 in. Current Wheelbase Space: 172

Side View Left Side Available Space: 62.25 in. Required Wheelbase Space: 129

Position	Description	Price	Weight
RH Under	Aftertreatment RH U/C AlumiNUM Non-Slip Cab Entry	0	0
LH Under	26in Aluminum 70 Gallon Fuel Tank LH U/C	165	11
RH BOC1	Aluminum Space Saver Battery Box RH BOC	211	-84
LH Def Tank	DEF Tank Small	0	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/24/2019 12:28:53 PM
Effective Date: Jan 1, 2019
Prepared by: Rick Venuso

Incomplete

Model Number: Model 348
Quote/DTPO/CO: Q72812464
Version Number: 38.10




JX Peterbilt - Wadsworth P125
42400 Hwy. 41

Geneva Public works
1800 South St

Wadsworth, Illinois United States 60083
Phone: (847) 395-7222
Fax: (847) 395-7240
Email: RVenuso@jxe.com

Geneva, Illinois United States 60134
Phone: (630) 232-1502
Fax:
Contact Email: jczyszczon@Geneva.il.us
Prepared for: Joe Czyszczon

Horizontal Dimensions

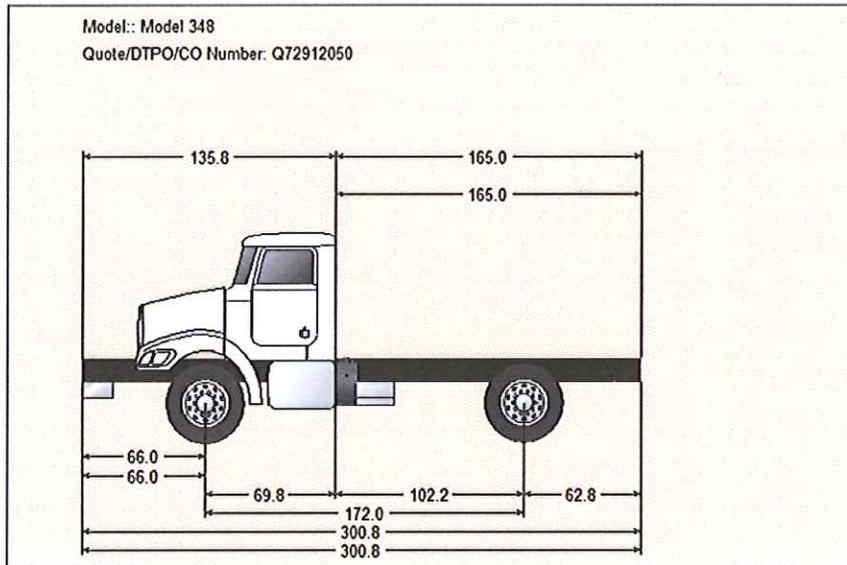

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 1/24/2019 12:29:12 PM
Effective Date: Jan 1, 2019
Prepared by: Rick Venuso

Incomplete

Model Number: Model 348
Quote/DTPO/CO: Q72912050
Version Number: 38.10



HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 1

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

To: City of Geneva
Attn: Nate Landers
Quote Date: 1/14/2019
Valid Until: 2/13/2019

Quoted By: Joe Vagle
Quote #: 120699
Phone: 847-836-4996
Fax: 563-927-7108
Email: jvagle@hendersonproducts.com

Quoted:
Geneva Single 2019

Henderson Products is pleased to present the following quote. Please contact us if you have any questions.

Reversible snow plow

Plow Length: **10' length**
Moldboard Trip: **Full trip with 2 external compression springs**
Pushframe Type: **Standard Circle Frame with Top Mount Cylinders**
Moldboard Height: **36" height**
Moldboard Shield: **Integral shield**
Moldboard Sheet Material: **10 GA GR50 steel (standard)**
Hydraulic Cylinders: **4" x 2" x 10" reversing nitrided cylinders**
Paint: **Henderson Orange**
12" Rubber Deflector: **Yes, w/ SS Backer**
Install Rubber Deflector: **Yes**
36" Plastic Side Markers, Pair: **Yes**
Parking Jack, Screw Adjustable: **Yes**
Install Parking Jack: **Yes**
Cutting Edge: **3/4" x 6" Carbide cutting edge with cover blade**
Curb Guard, Installed: **Double Wrap around curb guards**
Hitch, Plow Portion: **Quick Link hitch**
Plow Portion Installed on Plow: **Yes**
Hitch, Truck Portion: **Quick Link**
Hydraulic Lift Cylinders, Truck Portion: **4" x 2" x 10" Nitrided Lift Cylinder**
Option 1 Description: **140592 Pete Hitch**

TGS salt / sand spreader

TROUGH MATERIAL: **201SS**
AUGER SIZE AND TYPE: **6" dia. auger, direct drive**
MOUNTING BRACKETS: **Std brackets for 96" wide bodies**
MOTOR W/ SPEED SENSOR: **Motor w/integral speed sensor**
Option 1 Description: **Slurry Tube**

PWS liquid pre-wetting system

Power Source: **Hydraulic Powered Pump**
Application: **Munibody**
Product Size: **Munibody 9ft RDO**





HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 2

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

Control Box: **No Valve, Hydraulic Powered Pump and Flow Meter**
Pump: **Upgraded Pump Rated at 8.2 GPM**
Console: **None-Deduct PWSH-I Console**
Tank Size: **No Tank(s)-Deduct MUNI 75 gal tank**
Spray Assembly: **No Nozzles**
Mounting Hardware: **No Mounting Hardware or N/A**
Option 1 Description: **Dual 120 gallon tanks**

Installation Workup

Facility: **IDC-IL**
Chassis Delivery To Henderson: **Truck Dealer/Customer Delivers**
Completed Truck Delivery Method: **Customer Pick-Up**
Chassis Make: **Peterbilt**
Chassis Model Yr: **2020**
Chassis Model: **348**
Useable CA/CT: **120**
Front Axle Rating: **20000**
Rear Axle Rating: **40000**
Front Frame Ext?: **Yes**
Frnt Frame Ext Type: **Partial**
Front Frame Wall: **Single Wall**
Front Frame Width: **34"**
Pump Location: **Transmission Mount Pump**
Transmission Type: **Automatic**
Transmission Model: **Allison Transmission**

Hitch Type: **Low Profile or Manual Tilt Type Hitch**
Mount Type: **Engineered Truck Hitch (sales to order hitch w/ unit)**
Mount Spec: **140592 Peterbilt 348 Specific Hitch**
Front Bumper: **OEM Bumper Cut and Split**

Front Plow Type: **Standard Henderson Plow**
Plow Markers (Front Plow): **IDC Install of fact supplied markers, sales to order w/ unit**
Rubber Deflector Install: **Supplied/Installed @ Factory, sales to order w/ unit**
Front Plow Curb Guards: **Supplied/Installed @ Factory (Sales to order with unit)**
Plow Jack Install: **Supl'd/Instl'd on plow @ Factory, Sales order with unit**

Wing Type: **Install Mid-Mount Wing System (Non-extend)**
Wing Stop: **Yes (factory supplied)**
Plow Markers (Wing Plow): **IDC Install fact supl'd marker, single, sales order w unit**
Wing Options 1: **160921 +137120.201 Whelen wing warning lights**

Dump Body Type: **Mark E Single Axle**
Floor Length: **(10') Floor length**
Hoist Type: **Tele Trun HoIst with Subframe, Internal Doghouse**





HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 3

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

Body Material (Sides/ends): **Stainless Steel Type Body Material**
Tailgate Release Type: **IDC supplied Electric over air valve**
Cabshield Install: **Supl'd by fact, welded to body @ IDC, sales to order w/ unit**
Asphalt Lip (FF Only): **Supld by Fact, instll @ IDC, Weld On (Sales order with unit)**
Grab Handle(s): **(1) Factory supl'd, install @ IDC (Sales to order with unit)**
Ladder(s): **Supplied by factory, Install @ IDC (sales to order w/ unit)**
Ladder Install QTY (Dump): **(1) LADDER INSTALLED @ IDC (LABOR ONLY)**
Ladder Install Style (Dump) 1: **3 Step Pull Out**
Ladder Install Loc 1 (Dump): **Driver Side Front**
Shovel Holder: **(1) IDC Supl'd Spring Loaded SS Shovel Holder w/ SS brckt**
Shovel Holder Loc (1): **Driver side headsheet**
Vibrator: **Buyers Vibr, 3500 lb (TA) (order vib pad on unit)**
Sideboards: **Wood (Un-Painted), supplied/installed by IDC**

Sideboard Notes:

Body Install Options 1: **Installation of pin on asphalt lip**

Body Spec Notes:

Spreader Type: **TGS**
TGS Drive Type: **Hydraulic Drive**
TGS Spinner Configuration: **Single Spinner Install**
TGS Body Type: **Standard straight gate body install**
TGS mounting type: **Pin on style (interchangeable with asph lip, if applicable)**
HYD QD Mount Brackets: **Stainless Steel QD Mount in front of dump body bolster**

Prewet/Liquid System: **Frame Mount Prewet System**
Configuration: **IDC Supplied (sales to quote from vendor)**
Vendor Supplied Kit: **240 gallon behind the cab pre-wet system**
Install Location: **Cradle Mount (verify fit or CA/CT if Req'd)**
Drive Configuration: **Hydraulic Drive, Henderson Supplied (Sales to order w/unit)**
Controls: **Supplied by IDC (sales to order w/ hyd cntrls)**
Feedback Sensor: **Yes (Sales to order w/unit)**
Flush Kit: **Supplied by factory, Installed @ IDC (sales to order w/unit)**
Slurry Tube: **Factory Supplied/Installed (sales to order w/unit)**
Liquid Options 1: **Flush Tank 161566**

Chassis Accessories: **Yes (SELECT RELATED OPTIONS BELOW)**

Mudflaps (Rear): **Swinging w/Logo**
Mudflap Type (Rear): **36" Swinging, SS (with LOGO)**
Fenders: **Front Quarter Fenders, Poly (standard)**
Pintle Plate: **Yes (select from options below)**
Pintle Plate Configuration: **3/4" Plate, PH20 Holes, SA w/ SubFrm (w/ D-Rings, 3LTC)**
Pintle Hook: **20 Ton**
Trailer Plug (1): **7 Pin Trailer Plug, Truck end 7-Way RV,new style (municipal)**





HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 4

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

Truck Wash: **Complete Truck Wash/Clean/Vac 1**
Warranty: **Standard 1 Year Warranty**
Reflective Tape: **Reflective Tape, Henderson Logo (60' Linear)**
Decal Package: **Package Decal Kit**

Electrical: **Yes (SELECT RELATED OPTIONS BELOW)**
Power Distribution Panel: **Power Distribution Panel**
Misc Electrical Supplies: **Req'd Misc Elect Supplies**
Plow Lights: **Plow Lts, ABL, Heated**
Plow Light Brackets: **Plow Lt Brckts, SS, PETERBILT 348, Pair**
Worklight(s) QTY: **(QTY 3) Work Lights (Select type below)**
Worklight (1) Type: **LED, Worklight, 4in Round (Optilux)**
Worklight (1) Gen Location: **Tailgate Spinner**
Worklight (2) Type: **LED, Worklight, 4in Round (Optilux)**
Worklight (2) Gen Location: **Tailgate Spinner**
Worklight (3) Type: **LED, Worklight, 4in Round (Optilux)**
Worklight (3) Gen Location: **Front Steps**
Rear Dump Bolster (S/T/T): **LED S/T/T, kit (West) (order holes)**
Rear Dump Bolster (Back-up): **B/U Lights, LED, Clear, Oval, pair (Order holes with body)**
Back up alarm: **Backup Alarm, 97db**
Junction Box/Backup Alarm Bracket: **Backup Alarm Bracket Installed**
Brake controller: **Brake Controller, Voyager Brake Controller**
License Plate Lights: **IDC Supplied License Plate Light Gray Housing**
Backbone & Wire Standoffs: **14' Backbone (For TA)**
Camera: **MS Foster**
Camera Kit: **Camera Sys, 7" Monitor, 2 Cameras w/wash & Exten Cble**
IDC Light Package: **72" Justice (ILDOT) w/2 wk lites, Short Risers**

Hydraulics: **Full Hydraulic Package**
Hyd Supplier: **Certified (Select Pkg Below)**
Hyd Supplier (Spec): **Certified A Package # 11014289**
Controls Type: **Electric Controls**
Low Oil Shut Down: **Yes, included in Hyd Pkg**
High Temp Oil Shut Down: **Yes, included in Hyd Pkg**
Low Oil Indicator: **Yes, included in Hyd Pkg**
SS Tubing Upgrade: **TA, F&R lines, 6' Frnt, 9' Rr**
Quick Coupler Upgrade: **Standard Quick Couplers**

Hydraulics Notes:

Henderson Wing System

WING CONFIGURATION TYPE: **LIGHT DUTY**
WING SYSTEM: **REAR OF CAB SYSTEM**
REAR BRACE LOCATION: **REAR BRACE AHEAD OF REAR AXLES**
WING SIDE LOCATION: **RIGHT HAND SIDE**





HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 5

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

TRIP TYPE: **ADJUSTABLE TRIP EDGE MOLDBOARD**
WING BRACES: **1 SHOCK BRACE**
CUTTING EDGE LENGTH: **8' CUTTING EDGE**
CUTTING EDGE MATERIAL: **3/4 X 6 CARBIDE CUTTING EDGE**
MOLDBOARD MATERIAL: **10GA GR50 CURVED MOLDBOARD**
MOLDBOARD HEIGHT AND SHAPE: **32" STRAIGHT MOLDBOARD**
MOLDBOARD DISCHARGE: **6" FLARE ON DISCHARGE W/BEAD**
MOLDBOARD BOTTOM ANGLE: **4 X 4 X .50 BOTTOM ANGLE**
MOLDBOARD TOP FLANGE: **MOLDBOARD BOXED-IN TOP FLANGE**
MOLDBOARD ADD ONS: **MOLDBOARD CENTER LIFT EYE**
FRONT MAST TYPE: **8" LIFT/11" CYL HYD FRONT MAST**
FRONT MAST MOUNT: **FRONT CROSSTUBE & CHEEKPLATES**
REAR SUPPORT AND MAST: **CHEEKPLATES W/REAR CROSS TUBE**
MOLDBOARD HEEL LIFT: **FRONT MLDBRD HEEL LIFT, 3" CYL**
PAINT: **MB STD ORANGE, ALL ELSE BLACK**
CURB GUARD, INSTALLED: **CURB GUARD, INSTALLED**
ORANGE SIGHT MARKER, SHIP LOOSE: **ORANGE SIGHT MARKER, SHIP LOOSE**
HEEL LIFT HOLDING VALVE: **HEEL LIFT HOLDING VALVE**

MARKE SA Dump Body

BODY LENGTH: **10ft BODY LENGTH**
SIDE STYLE: **STRAIGHT SIDES**
SIDE HEIGHT (FROM FLOOR): **30" SIDE HEIGHT**
REAR BODY PROFILE: **STANDARD STRAIGHT VERTICAL GATE**
REAR CORNER POSTS: **REAR BOLSTERS 8" ABOVE SIDES**
BOARD POCKETS: **2" WIDE BOARD POCKETS**
HOIST TYPE: **TRN MOUNT TELE HOIST W/ SUBFRM, INTERNAL DOGHOUSE**
HOIST CYLINDER/MODEL: **MAILHOT CS-SERIES, DOUBLE ACTING, CS90-4.5-3DA**
HYDRAULIC PUMP: **NO FACTORY SUPPLIED HYDRAULIC PUMP**
CYLINDER CRADLE STYLE: **STANDARD HOIST CRADLE**
INSTALL SUBFRAME AND/OR CYLINDER: **SHIP LOOSE - DEALER TO INSTALL**
EXTRA BODY PROP: **NO EXTRA BODY PROP**
HYDRAULIC RESERVOIR: **NO RESERVOIR - DEALER TO SUPPLY**
FLOOR MATERIAL: **1/4" AR400 FLOOR**
FLOOR TO SIDE RADIUS: **5" RADIUS FLOOR TO SIDE**
LONGSILL MATERIAL: **5" I-BEAM LONGSILLS (STANDARD SKIP WELD)**
SIDES/HEADSHEET MATERIAL: **10GA 201SS SIDES/HEAD**
SIDE BRACING TYPE: **DOUBLE V-CRIMP INTERMEDIATE SIDE BRACES**
SIDE BRACE MATERIAL: **DOUBLE V-CRIMP SIDE BRACE**
TOP RAIL STYLE: **FLAT (2" FLAT, THEN SLOPED)**
CONTOURED FRONT CORNER POSTS: **NO FRONT CORNER POSTS**
REAR CORNER POST MATERIAL: **7GA 201SS REAR CORNER POSTS**
TAILGATE STYLE: **STANDARD TAILGATE**
TAILGATE SHEET MATERIAL: **10GA 201SS TAILGATE SHEET**
TAILGATE BRACING: **SINGLE HORIZONTAL TAILGATE BRACE**
TAILGATE BRACE MATERIAL: **10GA 201SS TAILGATE BRACING**
TAILGATE TOP PIVOT HARDWARE: **1-1/4" PINS, 1" PLATES, NON-GREASABLE**





HENDERSON

CUSTOMER QUOTE

PRODUCTS, INC.

Page 6

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

TAILGATE LATCH TYPE: **DBL ACTING AIR CYL TG RELEASE, GREASABLE SS BUSHINGS**
TAILGATE RELEASE VALVE: **NO TAILGATE RELEASE VALVE**
TAILGATE PIN LANYARDS: **NO TAILGATE PIVOT PIN LANYARDS**
TAILGATE LIFT LOOP: **NO TAILGATE LIFT LOOP OR DRING**
LATCH JAWS: **LOWER TG LATCH JAWS, GREASABLE**
COAL CHUTE: **COAL CHUTE**
COAL CHUTE TYPE: **STD 13.5" COAL CHUTE (201SS)**
COAL CHUTE QUANTITY: **SINGLE COAL CHUTE**
COAL CHUTE INSTALLED: **COAL CHUTE INSTALLED**
COAL CHUTE LOCATION: **CENTER**
REAR FACE LIGHT HOLES: **(2) OBROUND LIGHT HOLES, EA BOLSTER REAR FACE**
REAR SIDE MARKER LIGHT HOLE: **STD 2.5" SIDE MARKER LIGHT HOLES**
EXTERIOR LIGHT BOXES INSTALLED: **NO EXTERIOR LIGHT BOXES**
LIGHTING PACKAGE: **NO OEM LIGHTING PACKAGE**
BODY HINGE CONSTRUCTION: **STD SUBFRAME INTEGRAL HINGE**
BODY HINGE TYPE: **GREASELESS COMPOSITE BUSHING HINGE BLOCKS (I)**
BODY HINGE PAINT: **YES, REAR HINGE PAINTED @ FACTORY**
PAINT PREPARATION: **SS WASH-NATURAL FINISH, PRIME MILD PARTS (201/304SS BODY)**
CABSHIELD STYLE: **NO CABSHIELD**
ASPHALT LIP: **WELD ON ASPHALT LIP**
ASPHALT LIP MATERIAL: **201 STAINLESS STEEL**
ASPHALT LIP STYLE: **12" WELD ON, 7GA 201SS WITH 1/4" ENDPLATES**
ASPHALT LIP INSTALLED: **ASPHALT LIP SHIPPED LOOSE**
WALK RAILS: **NO WALKRAILS ON LOWER RUBRAILS**
TARP RAILS: **NO TARP RAILS**
SIDE LADDERS: **(YES) SIDE LADDER - Pick From List Below**
SIDE LADDER MATERIAL: **STAINLESS STEEL LADDER CONSTRUCTION - Pick From List Below**
DRIVER'S SIDE FRONT LADDER: **3 STEP PULL OUT LADDER (201SS)**
INSTALL DRIVER SIDE FRONT LADDER: **NO, SHIP DRIVERS SIDE FRONT LADDER LOOSE**
DRIVER'S SIDE REAR LADDER: **NO DRIVERS SIDE REAR LADDER**
CURBSIDE FRONT LADDER: **NO CURBSIDE FRONT LADDER**
CURBSIDE REAR LADDER: **NO CURB SIDE REAR LADDER**
STEP(S): **NO STEP(S)**
GRAB HANDLES: **NO GRAB HANDLES**
Show Options: **Show Options**
SIDEBOARDS: **NO SLOPED SIDEBOARDS**
RUBBER MOUNTING PADS: **NO RUBBER MOUNTING PADS**
VIBRATOR MOUNTING PAD: **VIBRATOR MOUNTING PAD, BETWEEN LONGSILLS (MILD)**
REAR APRON FILLER PLATE (FOR TGS SANDER): **NO REAR APRON FILL PLATE**
INSTALL TGS SPREADER: **NO TGS INSTALL**
HEATED BODY: **NO HEATED BODY OPTION**
CRADLE MOUNT TOOLBOX: **NO TRIANGULAR CRDL MOUNT TOOLBOX (SLOPED HEAD P2P ONLY)**
TOOLBOX (BODY INTEGRAL): **NO INTEGRAL BODY TOOLBOX**
Option 1 Description: **140627.201 cabshield**
Option 2 Description: **TGS Mtg hardware for asphalt lip**





HENDERSON

PRODUCTS, INC.

11921 SMITH DRIVE
HUNTLEY, IL 60142
PHONE: 847-836-4996
FAX: 563-927-7108

CUSTOMER QUOTE

Page 7

Single Package: \$91,483.00
Package(s) : 1
Total: \$91,483.00

Signed: _____ Date: _____

Quote notes:

